



DLS SCANDINAVIA 3C COMPETITION GRADE MIDRANGE

DLS Scandinavia 3C is a midrange specially designed for competition use. The extreme audio performance makes it a winner in every Pro installation.

FEATURES AND BENEFITS:

- ▷ Extreme audio performance, transparent and clear sound
- ▷ Great imaging and staging capabilities
- ▷ High resolution and dynamics, rich of micro details
- ▷ Extremely wide frequency range


Size of midrange 3"
Impedance 4 ohm
Rec. amp. power 50 - 200 Watt
Frequency range 80 Hz - 14 kHz (in axis) +- 3 dB

Sensitivity 86 dB
Cone material Carbon fibre
Outer size 84 x 84 mm (3,31" x 3,31")
Mounting hole 78 mm (3,25")
Installation depth 45 mm (1,77")
Rec. X-over freq. LP: 200 Hz / HP: 6 kHz
Rec. enclosure 1 litre (0,035 ft³) or open air
Rec. cable DLS HQS 2 x 2,5
Rec. line cable DLS HQL

Fs 98 Hz
Vas 1,8 litres / 0,063 cuft
Re 3,6 ohm
Qts 0,50
Qes 0,67
Qms 2,04
BL 2,93
Cms 1,0071 mm /N
Mms 2,60 g
L 1 kHz 0,37 mH
L 10 kHz 0,097 mH
SD 36 cm²

DLS Svenska AB
Göteborg - Sweden
Phone: +46 31 840060
www.dls.se

**DLS SCANDINAVIA 3
IMPEDANCE CURVE**

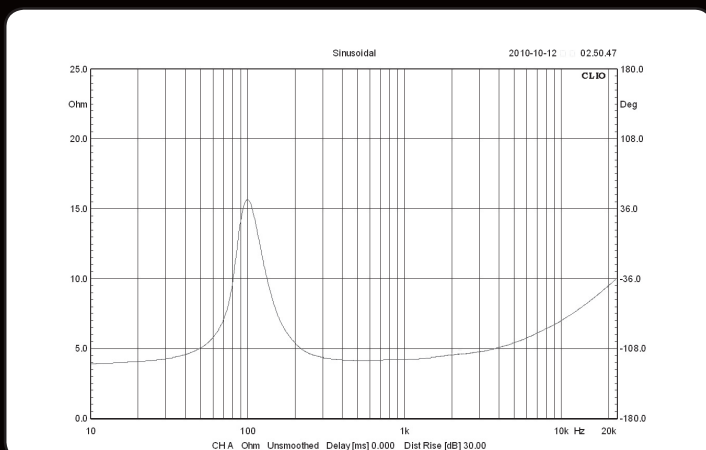

**DLS SCANDINAVIA 3
FREQUENCY RESPONSE CURVE**

